



**ICEMCRETE®**

Manufacturers of Distinctive Decorative Coatings

# WALL PRODUCTS

WALL PREPARATION PRODUCTS, WALL FINISHES & SEALERS



# CEMCOTE

BRUSH OR SKIM-ON CEMENT COATING



CemCote Skimmed Custom Colour

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.



CemCote Skimmed Dark Grey

A finely ground mixture of white Portland cement, pigments and chemicals. It is supplied in powder form requiring mixing with water on-site to produce a smooth, flowing coating which sets rock hard.



**SUITABLE SURFACES**  
Interior & exterior plastered or previously painted walls.

**FINISH**  
Slightly textured when applied with a brush.  
Smooth when applied with a trowel.

**THICKNESS**  
1.6 - 2.5mm.

**APPLICATION**  
Brush-on or Putzmeister application:  
Refer to CemCote Brushed datasheet.  
Skim-on:  
Refer to CemCote Skimmed datasheet.


**CURING**  
Initial set - 1 hour. The completed work should be allowed to air cure for 24 hours after application, before mist spraying the entire wall from bottom to top (to prevent run marks) evenly at least twice during the day thereafter. The moisture in the substrate must be less than 5% prior to sealing.

**PACKAGING**  
5 & 25kg containers.

**COVERAGE**  
Brush-on or Putzmeister application: 2 - 5m<sup>2</sup> per kg/coat depending on suction and texture of the surface or 25 - 50m<sup>2</sup> per 25kg (2 coats).  
Skim-on: 1 - 1.1kg's per m<sup>2</sup> or 25 - 30m<sup>2</sup> (2 coats) per 25kg container. Depending on surface texture and porosity.



COUNTERTOP / VANITY & BASIN  
CemCote Skimmed Dark Grey

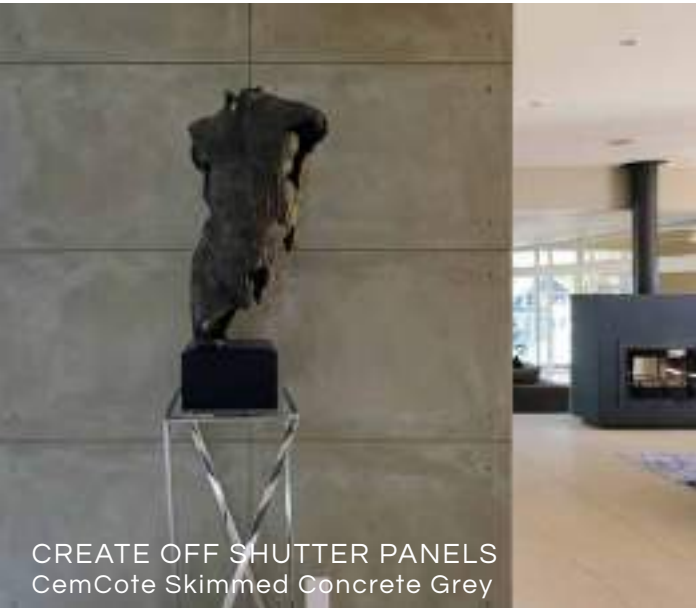


CREATE OFF SHUTTER PANELS  
CemCote Skimmed Concrete Grey

BENEFITS

- For interior & exterior use
- Brush-on or skim-on application
- Durable and weatherproof
- Interesting colour variation
- Wears well over time







HOLLOW CORE HARDBOARD DOOR  
CemCote Skimmed Anthill Grey

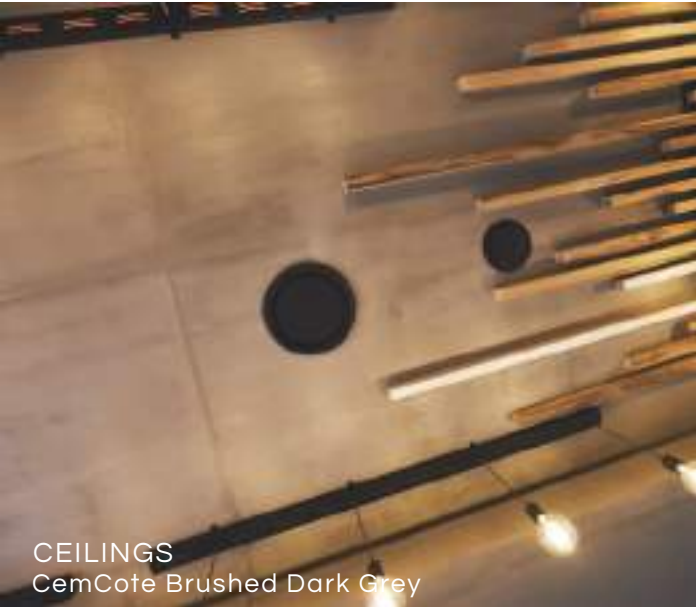

CEILINGS  
CemCote Brushed Dark Grey





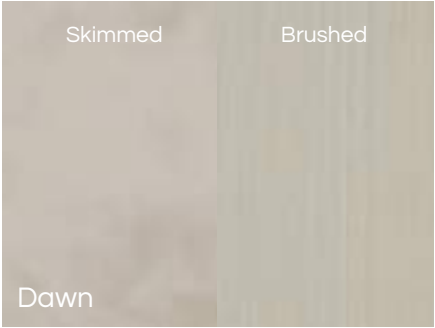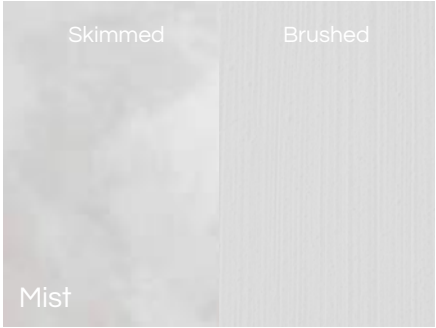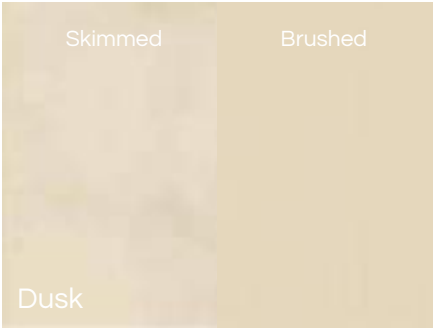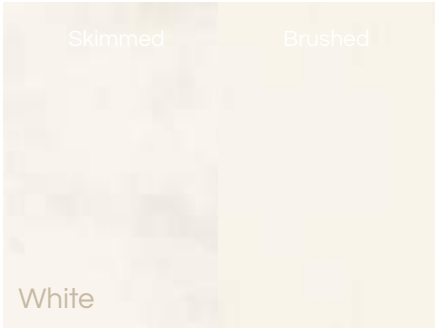

CemCote Skimmed custom colour

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.



# SATINCRETE

DECORATIVE INTERIOR COLOURED PLASTER



SatinCrete Dolphin Grey

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.



SatinCrete Graphite

SatinCrete is a 2 - 3mm pigmented, cement-based decorative plaster that creates a smooth, coloured finish for interior use only.



**SUITABLE SURFACES**  
Wood floated plaster. Fibre cement board, new dry walling, previously painted surfaces & polystyrene all need to be primed with CemBond & coated with Cemcrete's EIFS BaseCoat or BaseCoat Paste.

**FINISH**  
Smooth, sponge, brush or combed.

**THICKNESS**  
2 - 3mm.

**APPLICATION**  
Trowel-on.

**CURING**  
Initial set: 1.5 - 2 hours. Leave to air cure for at least 24 hours before moist curing with a light mist spray of water at least 3 times during the day. Always spray from bottom to top to avoid water run marks. Allow to dry for at least 3 days before sealing. The moisture in the substrate must be less than 5% prior to sealing.

**PACKAGING**  
20kg bag.

**COVERAGE**  
Approximately 3 - 4m² per 20kg bag.



BUILT-IN BATH  
SatinCrete Beach Sand



CEILING  
SatinCrete Mercury Grey

BENEFITS

- Stunning interior mottled wall coating
- Ideal for bathroom walls, including shower walls
- Once sealed, easy to clean and maintain due to its smooth finish
- Versatile application: can be applied to counter tops and vanities



COUNTERTOP / VANITY  
SatinCrete Pewter



BUILT-IN SEATING, COUNTER & WALL  
SatinCrete Clay







Parchment




Bone



Mercury Grey



Beach Sand

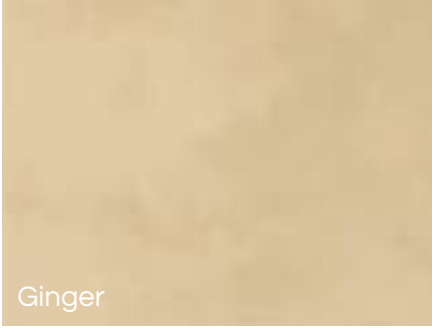

Ginger



Caramel



Taupe



Cocoa



Clay




Pewter



Dolphin Grey



Graphite

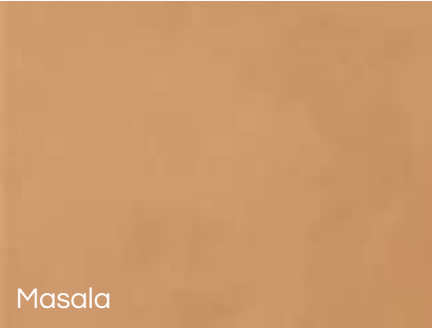

Masala

*Did you know*

Like many of our products, SatinCrete is very versatile and can be used to coat counters, artwork, showers and even baths.



SatinCrete Pewter

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.



# CEMWASH

ROUGH TEXTURED CEMENT WALL FINISH



CemWash White - German Schmeier

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.



CemWash Sandstone

A two-coat decorative, pigmented, weatherproof cement finish. Having a base of Portland cement, it sets rock-hard, is UV resistant, economical & extremely durable. The purpose is to provide a tough, durable cement-based coating directly to brick, block or hard cured plaster walls.



SUITABLE SURFACES  
Interior & exterior walls.

FINISH  
Rough texture.

THICKNESS  
Min application thickness – 0.5mm. Max application thickness – 0.7mm.

APPLICATION  
Brush-on or spray-on.

CURING  
Each coat to be cured by wetting with clean water 3 times during the day following the day of application.  
Cure from bottom to top to avoid water run marks and colour variations.

PACKAGING  
25kg bag.

COVERAGE  
CemWash first coat grey: Approximately 15 - 17m² per 25kg bag  
CemWash top coat colour: Approximately 22 - 26m² per 25kg bag



DIRECTLY OVER BRICK  
CemWash Light Grey



GERMAN SCHMEAR  
CemWash White




BAG WASH  
CemWash Slate



HORIZONTAL BRUSH  
CemWash Light Grey



White

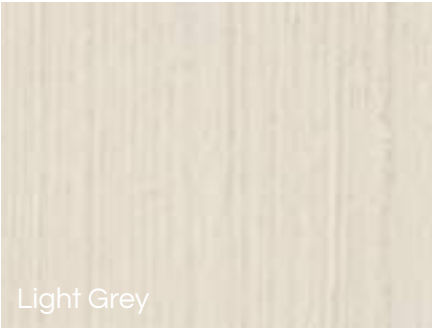

Light Grey



Grey




Sandstone




Wheat



Ochre

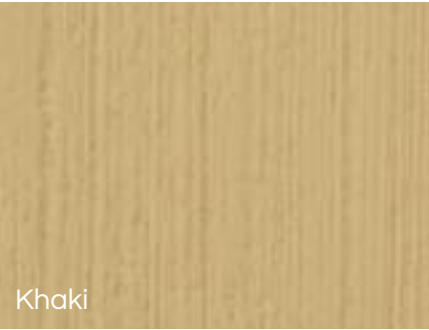

Khaki

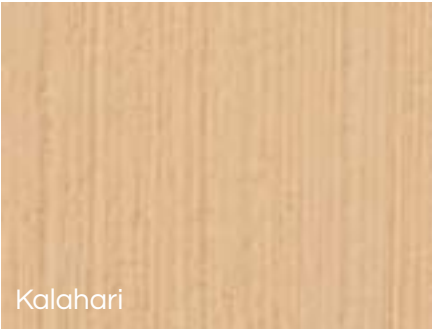

Kalahari



Golden Brown



Albany



Slate

BENEFITS

- Interior & exterior use
- Easy brush-on application
- Textured finish
- Resistant to water penetration
- Wears well over time
- Extremely durable & UV resistant
- Can be applied directly to brickwork to reduce the cost of plastering and then painting
- 3-in-1 brush finish (plaster, paint and weatherproofing)



# RENOCRETE

VERSATILE SMOOTH / TEXTURED OVERLAY



RenoCrete Cloud Grey

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.



RenoCrete Pebble Black

RenoCrete is a pre-coloured spray or trowelled-on cement-based polymer modified two-part resurfacing system. RenoCrete beautifies existing surfaces while achieving good compressive, tensile and flexural strength.



**SUITABLE SURFACES**  
Wood floated plaster, fibre cement board, new dry walling and polystyrene coated with Cemcrete's EIFS BaseCoat or BaseCoat Paste.

**FINISH**  
Sprayed-on / Trowelled-on / Knock-down.

**THICKNESS**  
2 - 3mm.

**APPLICATION**  
Spray-on with a hopper gun or steel trowelled.

**CURING**  
In hot dry conditions cure completed work by mist spraying with water 3 times the following day.

**PACKAGING**  
20kg bag.

**COVERAGE**  
Approximately 3 - 5m<sup>2</sup> per 20kg bag.



- BENEFITS**
- Beautifies existing concrete surfaces
  - Achieves good compressive, tensile & flexural strength with abrasion resistance
  - Can be applied onto wood floated plaster, polystyrene or Nutec board coated with Cemcrete's EIFS BaseCoat system
  - Interior & exterior use
  - UV stable



Final colours for the spray and knock-down applications will vary from the smooth trowelled application. Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.



# CRETESTAIN

## ACID-BASED CONCRETE STAIN

CRETESTAIN | PRODUCT INFORMATION & COLOUR RANGE



A reactive mixture containing special chemicals which reacts with the OPC (Ordinary Portland Cement) to colour the surface. It produces and enhances mottling of the surface it is applied to.

### SUITABLE SURFACES

Any OPC (Ordinary Portland Cement) based surface.  
Newly placed concrete must be cured for at least 14 days prior to application.

### FINISH

Does not change the finish of a surface, only stains it. Will however enhance mottling.

### THICKNESS

Adds no thickness to surface.

### APPLICATION

Brush-on, roll-on, sponge-on, spray-on.

### CURING





All reacted residue must be removed by flushing thoroughly with water after a minimum of 4 hours.

### PACKAGING

1, 5 & 20 litre containers.





### COVERAGE

Approximately 8m<sup>2</sup>/litre/coat.

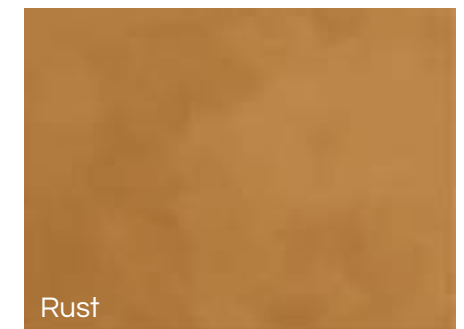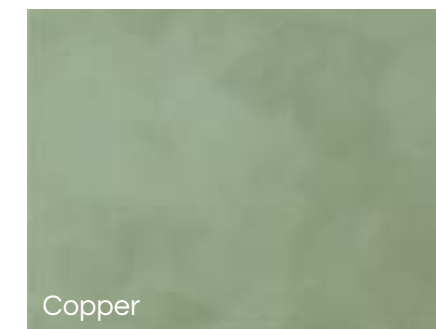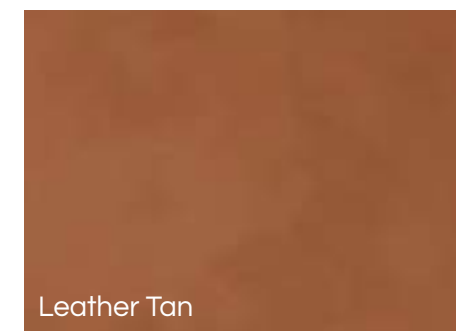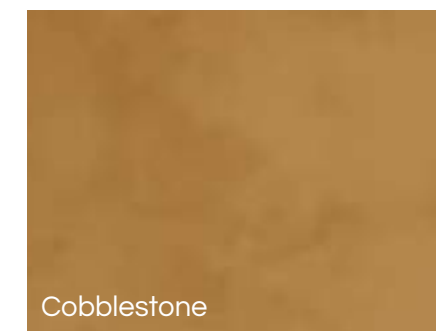

### BENEFITS

- Easy application with brush, roller, sponge or spray canister
- Economical application which cannot peel or flake
- For use on floors, walls and counters
- Suitable for interior and exterior use
- Can be diluted with water if lighter shading is required

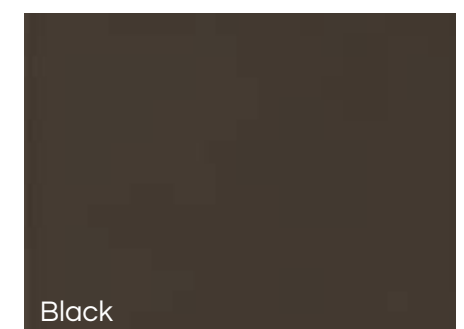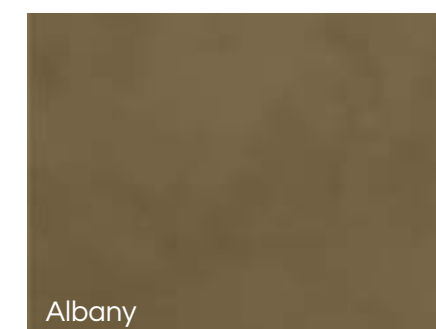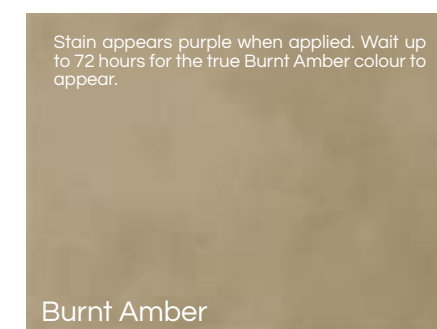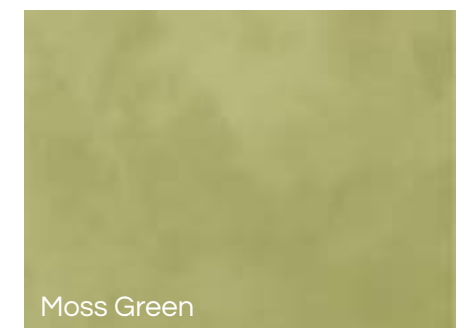




# DECOCRETE

SHAPEABLE TEXTURED PLASTER



DecoCrete Greystone & ColourCem Black

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

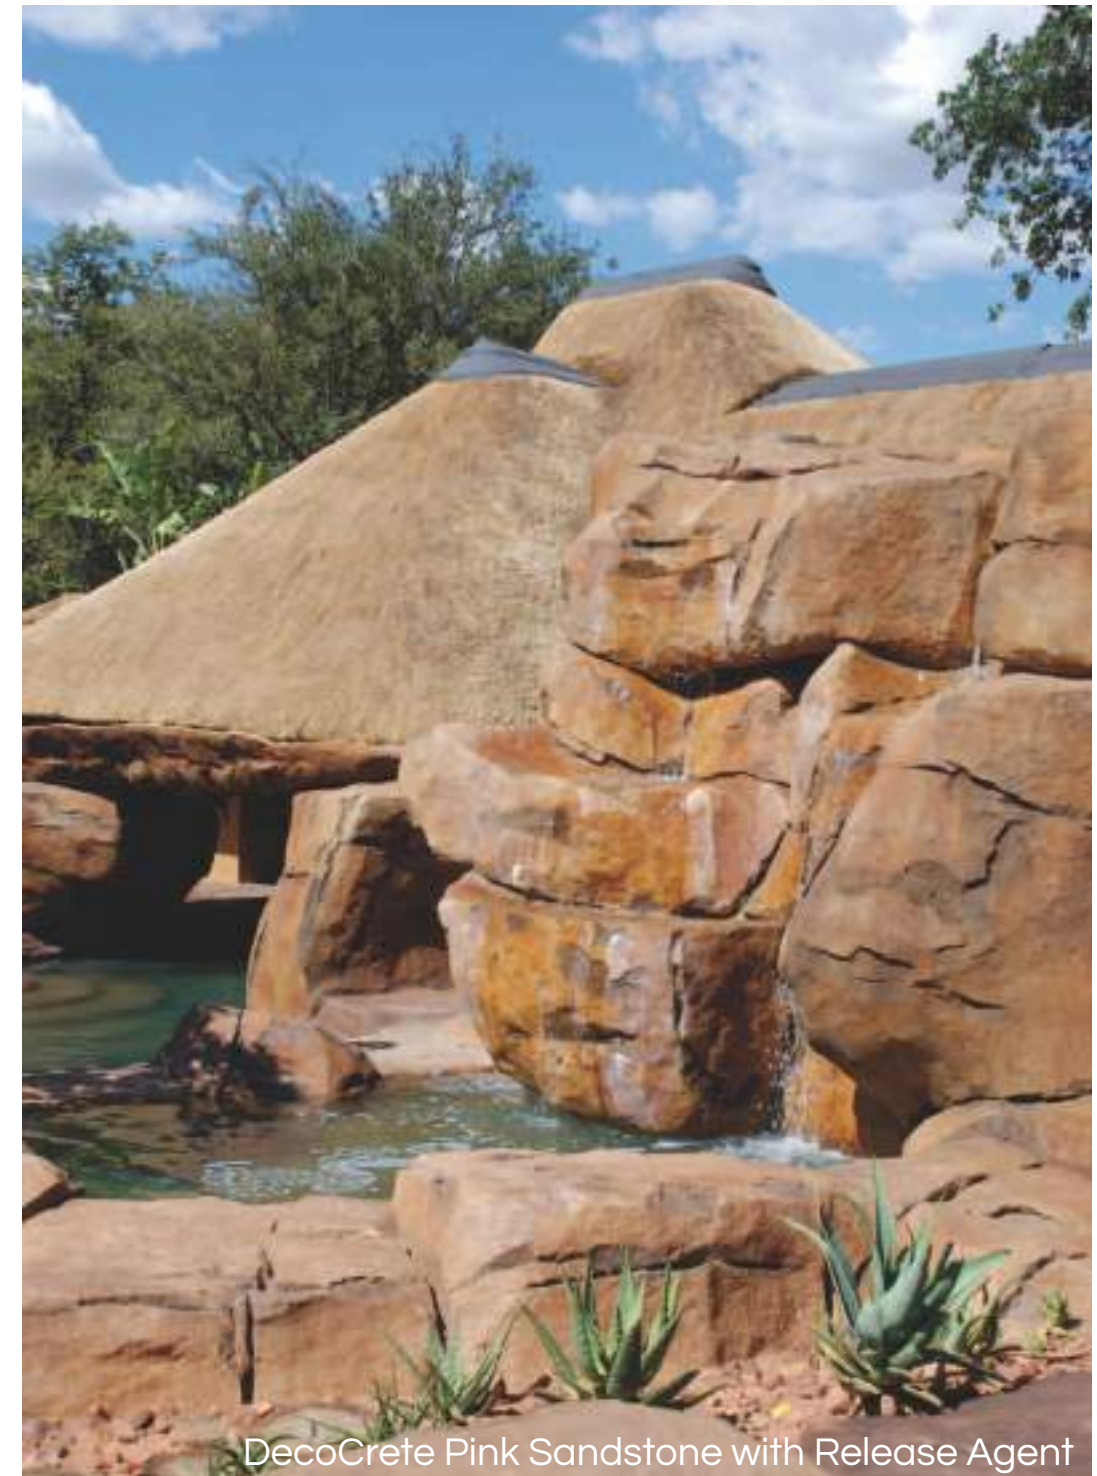

DecoCrete Pink Sandstone with Release Agent

A coloured, cement-based material formulated to be plastered to excessive thicknesses, but does not slide or shrink and dries rock-hard. A textured shaping system for the creation of artistic finishes, such as rock features, imitation brick walls and pool copings.



SUITABLE SURFACES

Shaped wire mesh (incorporating CemForce), interior & exterior concrete or screed base, interior & exterior wood or steel floated plaster, shaped polystyrene.

FINISH

Steel floated to a smooth finish. Textured to obtain different effects, can be carved with patterns or be imprinted.

THICKNESS

5 - 30mm per coat. When application is to be thicker than 10mm, the material can be pre-mixed with clean river sand to add bulk and texture.

APPLICATION

Steel trowel, hand packed, sponge finished and various other methods.

CURING



Cure by wetting with clean water 3 times on the day following the day of application to ensure hardness & durability. If Release Agent - Pigmented is used, the surface must be washed down after 72 hours curing time & subsequently cured by wetting with clean water.

PACKAGING

40kg bags.

COVERAGE

Approximately 1m² if applied 10mm thick.

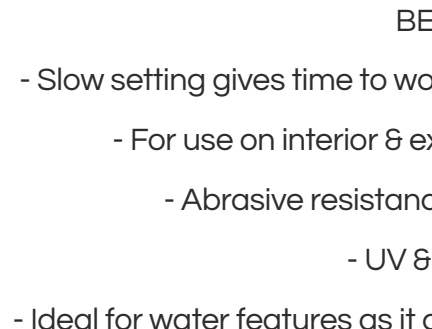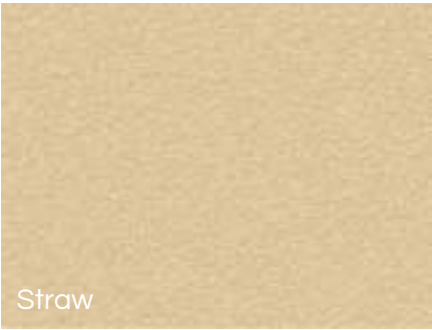

BENEFITS

- Slow setting gives time to work & manipulate the material in-situ
- For use on interior & exterior walls, floors & copings
- Abrasive resistance & coloured throughout
- UV & alkali proof
- Ideal for water features as it can continually be exposed to water

*Did you know*

DecoCrete can be applied to polystyrene shapes to provide speciality items such as floating rocks or crocodile heads for fish to hide under, or to create rock work or such to compliment dam/pond presentation.



# TPC

## DURABLE PIGMENTED COATING FOR WALLS, CEILINGS & ROOFS



Thermoplastic Coating Custom Colour

Thermoplastic Coating is a tough, thermoplastic, textured, weatherproof coating. Contains Mica & Silica for maximum film protection against ultra-violet light & weather abrasion.

### THERMOPLASTIC COATING | PRODUCT INFORMATION & COLOUR RANGE

#### SUITABLE SURFACES

Can be applied to exterior or interior walls of industrial, commercial or domestic buildings. Concrete & corrugated iron roofs. Ceilings.

#### FINISH

Smooth.

Slightly textured version (by order only).

#### THICKNESS

Approximately 60 microns per coat; the Mica chips protrude higher.

#### APPLICATION

Paint or roller. Can also be sprayed-on.

#### CURING


Two coat application with a minimum 6 hour interval between coats.

#### PACKAGING


5 & 20 litre containers.

#### COVERAGE

Approximately 3 - 6m<sup>2</sup>/ litre/ coat.



Cream



Ivory



Concrete Grey




Straw




Charcoal



Cocoa




Jasmine



White




Terracotta




Corn



Apricot




Slate



Mushroom



Oyster Pink



Clay



Green



# EIFS BASECOAT

COATING TO LEVEL OR REPAIR VERTICAL CONCRETE SURFACES & PREPARE POLYSTYRENE WALL PANELS.

EIFS BaseCoat is a special mixture of various admixtures and Ordinary Portland Cement for repair of concrete and masonry, adhering and surfacing of EIFS insulation boards prior to applying Cemcrete’s decorative coatings.

SUITABLE SURFACES  
Interior or exterior wall surfaces and polystyrene.

APPLICATION  
Trowel-on.

FINISH  
Smooth.

THICKNESS  
2 - 6mm.

CURING  
Leave to dry for 48 hours.

PACKAGING  
20kg bag.

COVERAGE  
Approximately 3 - 4m² per 20kg if applied at a 3 - 4mm thickness.

APPEARANCE / COLOUR(S)  
Grey powder.



Polystyrene panels installed



EIFS BaseCoat being applied onto polystyrene panels



Completed project - EIFS BaseCoat coated with paint

## BENEFITS

- Can be used as a base coat for levelling, patching & filling masonry, concrete & plaster before painting
- Can be used as an adhesive for adhering insulation board (polystyrene) or feature segments onto the interior or exterior of buildings
- Can be used as a leveller & filler for masonry, concrete or plaster surfaces

# BASECOAT PASTE

COATING TO LEVEL / REPAIR CONCRETE SURFACES & PREPARE POLYSTYRENE

BaseCoat Paste is a special mixture of adhesives, fillers & plasticisers for mixing with ordinary Portland cement to obtain a controlled mixture for repair of concrete & masonry, & attaching & subsequent surfacing of polystyrene insulation boards prior to painting or finishing. Steel reinforcing such as square tubing, steel bars, etc may be incorporated into the polystyrene (eg: underneath) to give extra support for large objects that will be subjected to higher weight loadings

SUITABLE SURFACES  
Suitable surfaces Interior & exterior wall surfaces, including polystyrene and certain foams or such.

APPLICATION  
Trowel-on.

FINISH  
Smooth.

THICKNESS  
3 - 6mm.

CURING  
Leave to dry for 48 hours.

PACKAGING  
5kg and 25kg containers.

COVERAGE  
Approximately 9 - 10m² per 25kg if applied at 3 - 6mm thickness.

APPEARANCE / COLOUR(S)  
Opaque sandy colour.



Polystyrene structure to be coated



BaseCoat Paste & Glass Fibre Mesh application

## BENEFITS

- Base coat for levelling, patching & filling masonry, concrete & plaster before painting
- Adhesive for pasting insulation board (polystyrene) or feature segments onto the interior or exterior of buildings
- Ideal for preparing polystyrene objects for over-coating with a decorative finish to create 3D artistic pieces or furniture.



Completed polystyrene block coated with CemCote Skimmed & Sealers



# MORTAR MIX

## WHITE & COLOURED MASONRY MORTAR

Mortar Mix comprises of white cement, graded sand & additives to give an attractive, high bond strength, waterproof joint for brick & blockwork. It has high-water retention for workability & plasticity.

SUITABLE SURFACES Joint for brick and blockwork.	THICKNESS 10mm.
APPLICATION Brick trowel and pointing tool.	PACKAGING 40kg bags.
FINISH Smooth or textured.	COVERAGE For 10mm joints approximately 0.8 - 1m <sup>2</sup> of 112mm brickwork per 40kg bag of Mortar Mix.
CURING Damp the wall surface with clean water during the day following placing for increased hardness, waterproofness & durability of the mortar joints.	APPEARANCE / COLOUR(S) Pigmented powder. Custom colours can be made on request.



Colours matched to complement



Mortar Mix White

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample.

### BENEFITS

- Especially advantageous where consistency of colours, strength & quality are of importance
- Good water retention gives improved bond & bleeding characteristics
- Can be manufactured to SABS class 1, 2 and 3 specifications & most colours as required

# EXTERIOR CRACK FILLER

## TOUGH WATERPROOF CRACK FILLER

A very tough waterproof filler based on special thermoplastic resins & fillers. Softens slightly with increase in temperature, thereby relaxing the tension in the crack.

SUITABLE SURFACES Fills cracks, gaps around doors, window frames, light switches, knot holes, wood grain, nail holes etc. Adheres to cement plaster, gypsum plaster & timber.	THICKNESS 1 - 10mm.
APPLICATION Trowel-on.	PACKAGING 1.5 & 7.5kg containers.
CURING 12 hours.	COVERAGE Depends on width & depth of joint. Average 5m <sup>2</sup> per kg.
	APPEARANCE / COLOUR(S) White.

# CEMBOND

## NON-HAZARDOUS POLYMER-BASED RESIN (CONCENTRATE)

CemBond contains resin with exceptional adhesive qualities. It has been proven over the past couple of decades to be a reliable general-purpose adhesive for the building & decorative industry. It dispenses the need for hacking when plastering, tiling or painting onto smooth or friable surfaces. It can be used as an adhesive, a bonding liquid for friable surfaces, as a primer for PVA & acrylic paints, as a cement additive to improve adhesion, mixed with cement as a crack filler and mixed with propriety crack fillers to limit ghosting of filled spots when over coating with paint. It can be used in plaster mixes to improve the strength & integrity of the plaster & is invaluable for improving the adhesion of cement based decorative coatings to difficult surfaces.

SUITABLE SURFACES Dry stack brickwork, breeze blocks, stock & face bricks, concrete, hard & clean bag wash, scratch plaster, previously painted surfaces, tiles etc.
FINISH Translucent when dry.
APPLICATION Brush-on, sponge-on or roll-on.
CURING Bonding time: ± 1 hour. Initial set: ± 4 hours depending on weather. Needs to air cure for at least 12 hours.
PACKAGING 1, 5 & 20 litre containers.
COVERAGE 30m <sup>2</sup> /litre of concentrated CemBond mixed 1:5 with water per coat, depending on surface porosity.
APPEARANCE / COLOUR(S) Milky white liquid.



CEMBOND as cement additive




# DIRECT TO METAL

## NEW OR WEATHERED METAL PAINT

Direct-to-Metal Primer & Topcoat is a high-performance metal primer & topcoat with anti-corrosive pigments that binds the existing rust & forms a barrier to any future rust developing while providing an attractive protective & decorative weatherproof finish.

SUITABLE SURFACES Suitable for domestic, industrial and automotive uses, including priming of industrial steel framing, farm implements, tanks, roofs, handrails, window & door frames.	THICKNESS 80 - 100 micron.
FINISH Matt.	PACKAGING 5 & 20 litre containers.
APPLICATION Brush-on, roll-on or spray-on.	COVERAGE 8 - 10m² per litre per coat. Applied in a 2 coat application. Coverage will vary depending on the porosity of the surface.
CURING 12 hours.	

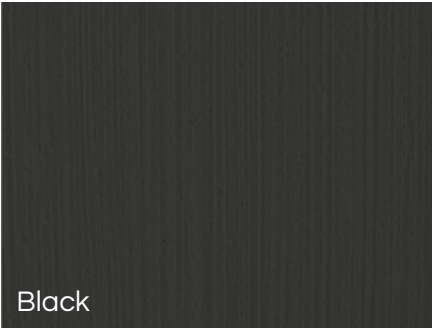

- BENEFITS
- Anti-corrosive pigments that prevent development of rust
  - Can be applied over existing rust
  - Attractive finish & available in a range of colours
  - One product that is used as the primer & top coat

# SEALERS

## PROTECTIVE BARRIERS FOR DECORATIVE COATINGS

Protecting cement walls with a good quality Cemcrete sealer is crucial & not only makes the surface easier to clean, it offers other benefits as well, such as enriching the colour intensity of the overlay, blocking the penetration of stains, & improving water repellency & abrasion resistance.

<b>SEALER PRIMER</b> ACRYLIC CO-POLYMER (WATER-BASED)
FINISH White - dries transparent.
CURING Initial set: Solvents evaporate after 2 days plus. Final cure: 14 days.
PACKAGING 1, 5 & 20 litre containers.
COVERAGE Approximately 5 - 6m² per litre per coat.

<b>CRETESEAL WATER-BASED SEALER</b> POLYURETHANE ACRYLIC SEALER
FINISH Transparent Satin Sheen.
CURING Initial set: 6 to 8 hours. Final cure: 7 to 10 days.
PACKAGING 1, 5 & 20 litre containers.
COVERAGE First Coat: Approximately 8 - 10m²/ litre. Subsequent Coats: Approximately 10 - 12m²/litre.

<b>MULTIPURPOSE SOLVENT-BASED SEALER</b> SOLVENT-BASED ACRYLIC SEALER
FINISH Transparent Gloss or Matt finish.
CURING Initial set: 2 to 3 hours depending on weather. Final cure: 7 days.
PACKAGING 1, 5 & 25 litre containers (Matt only available in 1 & 5 litre).
COVERAGE First Coat: Approximately 4 - 8m² per litre per coat. Subsequent Coats: should require less sealer than first coat.

<b>MULTIPURPOSE WATER-BASED SEALER</b> NON-YELLOWING CLEAR POLYMER SEALER
FINISH Transparent Gloss or Super Matt.
CURING Initial set: 4 hours. Final cure: 3 days.
PACKAGING 1, 5 & 20 litre containers.
COVERAGE Approximately 5 - 6m² per litre per coat.

<b>SILICONSEAL SOLVENT-BASED SEALER</b> PENETRATIVE WATERPROOFING SYSTEM
FINISH No colour or sheen effect on surface.
CURING Initial set: Solvents evaporate after 2 days plus. Final cure: 22 days.
PACKAGING 1, 5 & 25 litre containers.
COVERAGE Face bricks - 6m²/litre. Porous bricks - 3m²/litre. Concrete - 4m²/litre.

<b>SILICONSEAL WATER-BASED SEALER</b> PENETRATIVE WATERPROOFING SYSTEM
FINISH Milky white liquid which dries clear.
CURING Initial set: Evaporate after 2 days plus. Final cure: 14 days.
PACKAGING 1, 5 & 20 litre containers.
COVERAGE Face bricks - 6m²/litre. Porous bricks - 3m²/litre. Concrete - 4m²/litre.

<b>SLIP RESISTANT ADDITIVE</b> FINE WHITE GRANULES
FINISH May leave a slight opaque sheen on darker surfaces.
PACKAGING 90g's (enough for 5 litre).



0860 CEMCRETE

info@cemcrete.co.za

www.cemcrete.co.za



## HEAD OFFICE

Showroom & Warehouse  
8 Telford Street  
Industria  
(011) 474 2415  
info@cemcrete.co.za

## GAUTENG

Johannesburg Showroom  
227 Jan Smuts Avenue  
Parktown North  
(011) 447 3149  
jsa@cemcrete.co.za

## Centurion Showroom & Warehouse

15 Coachmen's Park  
26 Jakaranda Street  
Centurion  
(012) 653 6808  
pretoria@cemcrete.co.za

## CAPE TOWN

Showroom & Warehouse  
Unit 3 Eagle Park  
cnr Bosmansdam & Omuramba Roads  
Montague Gardens  
(021) 555 1034  
cape@cemcrete.co.za

We have distributors both nationally and internationally. Contact us to locate your nearest retailer or contractor.

**CEMCRETE®**

Manufacturers of Distinctive Decorative Coatings

Creating distinctive cement finishes  
as *unique* as you are.